



# **POLLEY TIMBER PTY. LIMITED**

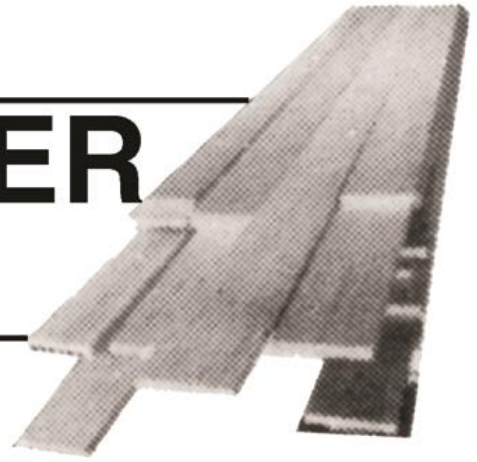

Ph: (03) 5221 1777

## **TIMBER LINING INSTALLATION**

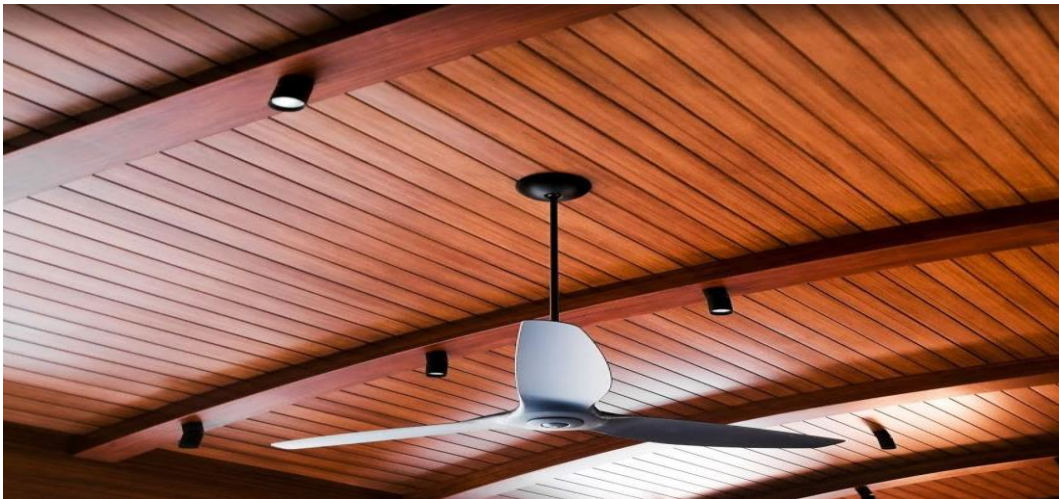

Timber lining is kiln dried to an average moisture content of 9-14%, which is suitable for internal use.

If used semi externally such as in an alfresco area, there is a very high likelihood the lining will take up moisture and expand, causing cupping and pressuring the boards to move outward, moving end assemblies etc...

If installing in a semi external area there must be a 10mm expansion joint fitted at least every 2 – 3 metres to accommodate the expansion.

Additionally and most importantly, the lining needs to be coated all round (including the ends) with a good quality oil or sealer as soon as received on site. Immediately after installation any exposed faces and edges must be coated again to help minimise future movement.

If you have any further questions please contact us prior to commencing the installation.